


Water filters

"NFIL"

Data Sheet

FEATURES


- Water filters for 6x8 hose fittings
- Simple installation / Max working pressure 5bar
- Bracket for wall mounting
- Transparent cup (SAN housing)

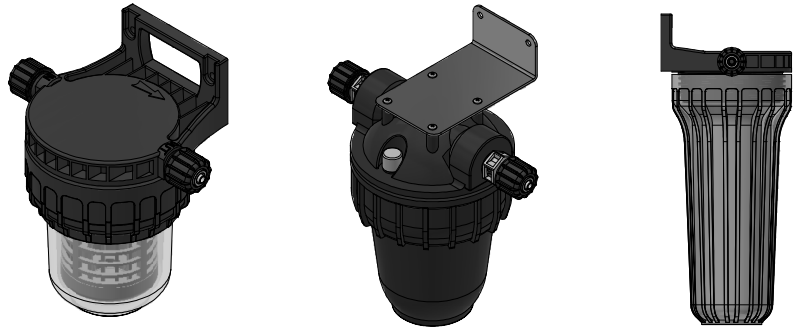

NFIL

Water filters with 6x8 hose fittings

- › Simple installation
- › Bracket for wall mounting
- › Transparent cup (SAN housing)

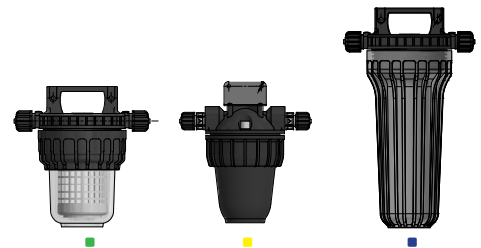

model	filter	cartridge	fitting	temperature (°C)	pressure (bar)
■ NFIL/100	ø 5" 100 µ	wired PP	6x8	40	5
■ NFILS/60	ø 5" (per nped) 60 µ	PET (washable)	6x8	40	5
■ NFIL/60	ø 5" 60 µ	PET (washable)	6x8	40	5
■ NFILS/100	ø 5" (per nped) 100 µ	wired PP	6x8	40	5
■ NFIL/60-10"	ø 10" 60 µ	PET (washable)	6x8	40	5
■ NFIL/CA	ø 5"	activated carbon	6x8	30	5
■ NFILTEMP	ø 5" 70 µ	SS	6x8	80	5

ACCESSORIES

description

Filter cartridge for nfil/100

Key for nped/nfil

Key for nfiltemp




Filter cartridge for nfil/60

Filter cartridge for nfil/60-10




Filter cartridge for nfil/ca

Filter cartridge for nfil/temp

NFIL 10"

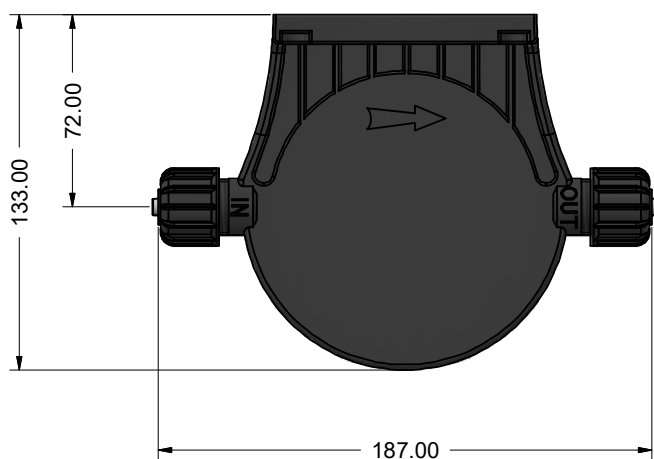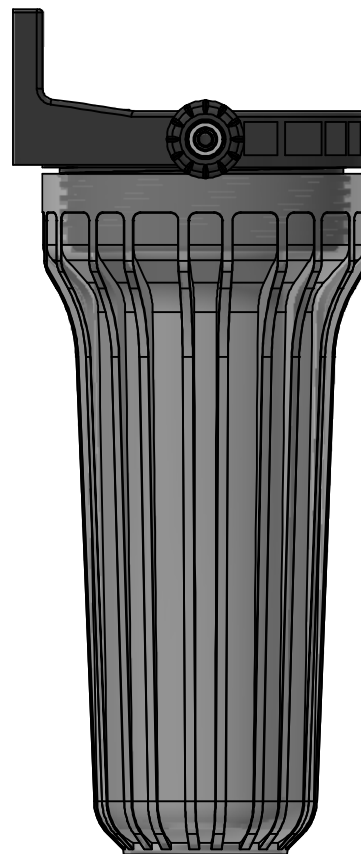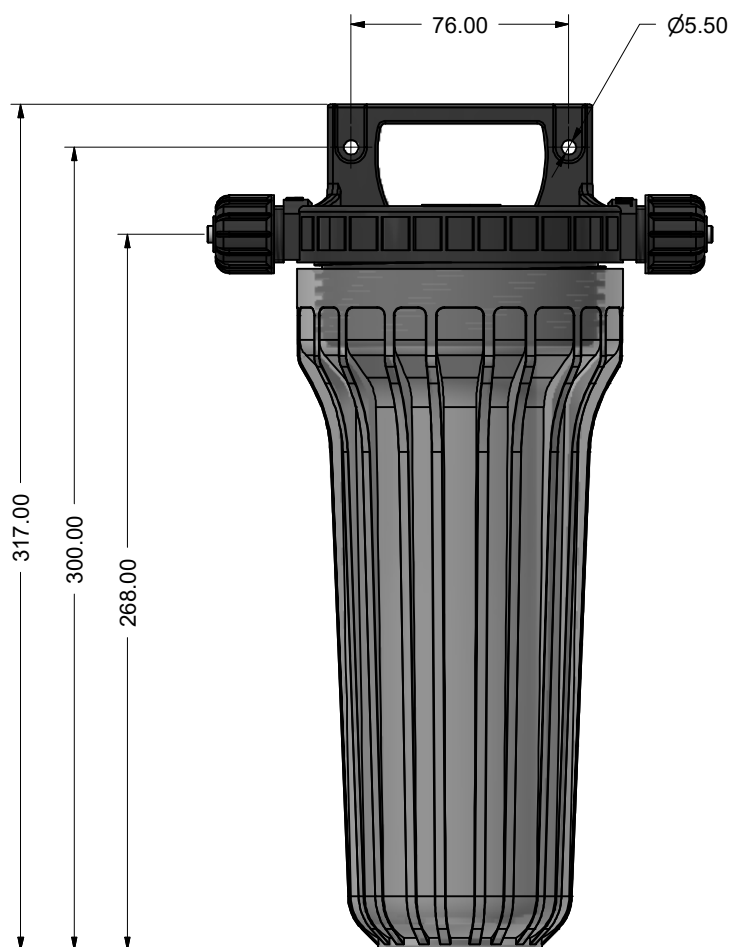

NFIL 5"

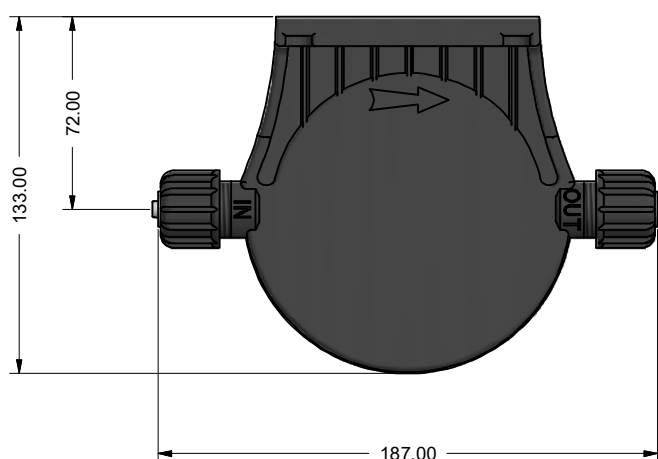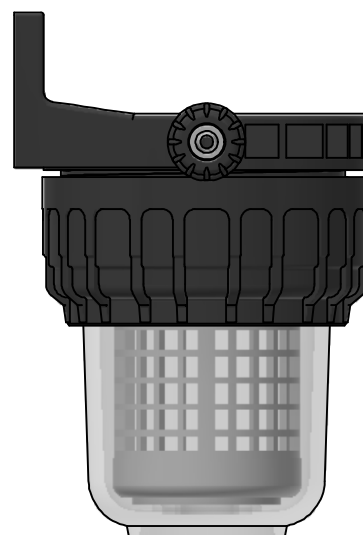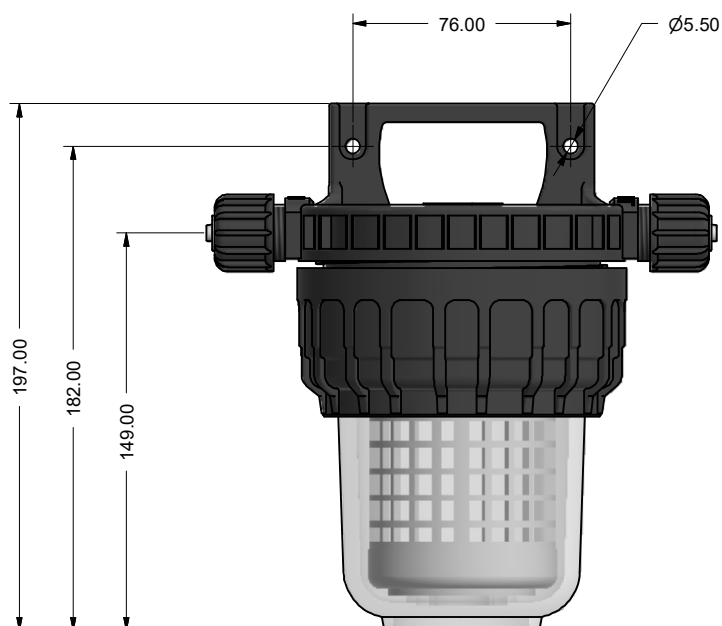

NFIL / TEMP 5"

